



Ref: HCS/1076/2002

Date: 19th October 2002

To,

All Consultants, Electrical Contractors &
Suppliers of Electrical Distribution Board,
Dubai.

Dear Customer,

**Padlocking Arrangement for Circuit Breakers (MCCBs)
Installed Before Tariff Metering**

Please be informed that, in order to improve the control and safety of electrical installations in the consumer premises, the following requirement shall be implemented in all new projects.

**' The Circuit Breakers/MCCBs installed before Tariff Metering
shall have provision for padlocking in its OFF position'**

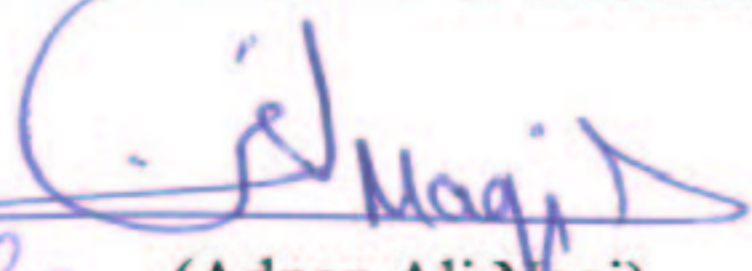
All Consultants, Contractors and Suppliers of Electrical Distribution Boards are requested to incorporate this requirement in their drawing submissions and installations at various sites.

A grace period of 4 months will be permitted to implement this requirement, from the date of issue of this letter (up to 28th February 2003).

Should you require any clarifications on the above, please do not hesitate to contact us.

Thanking you,

Yours faithfully,
For DUBAI ELECTRICITY & WATER AUTHORITY


20/10/02 (Adnan Ali Naqi)
Chief Engineer Field Services